

ICP2(G3) Production Quality In-Circuit Programmer


Specification

1 Mechanical

ICP2(G3) programmer size: 175 x 85 x 35 mm

2 Connectors

2.1 "Power" Connector (Power Jack, Center Pin 2.1mm)




Pin No.	Pin Name	Voltage Range	Pin Type	Description
1/center	POWER_1	12V to 15V	Power input with diode bridge, any polarity	Main ICP2(G3) power supply
2	POWER_2			

2.2 "USB" Connector (Type-B Female)




2.3 "RS-232" Connector (D-type 9 Female)



Pin No.	Pin Name	Voltage Range	Pin Type	Description
1	-	-	-	Not connected
2	PC_RXD	RS-232 level	RS-232 output	TxD output to PC
3	PC_TXD	RS-232 level	RS-232 input	RxD input from PC
4	PC_DTR	-15V to +15V	Power	Optional ICP2(G3) power supply
5	GND	-	GND	Ground connection
6,7,8,9	-	-	-	Not connected

ICP2(G3) Specification

2.4 "TARGET" Connector (D-type 15 Female)

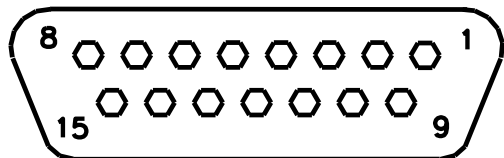

Pin No.	Pin Name	Voltage Range	Pin Type	Description
1	T_VDD	1.8V to 5.5V	Output or input with weak pull-down and programmable strong pull-down	Target VDD supply voltage
2	GND	-	-	Ground connection
3	T_SCK	1.8V to 5.5V	CMOS output or input with weak pull-down and programmable pull-up and pull-down	Target clock
4	T_MOSI	1.8V to 5.5V	CMOS output or input with weak pull-down and programmable pull-up and pull-down	Target data
5	T_MISO	1.8V to 5.5V	CMOS output or input with weak pull-down and programmable pull-up and pull-down	Target data, internally connected to T_MOSI for particular targets
6	T_VPP	1.8V to 13.5V	Output or input with weak pull-down	Target VPP supply voltage
7	T_TARG	5.0V	CMOS output	General purpose output
8	T_DIO_2	1.8V to 5.5V	CMOS output or input with weak pull-down	Target I/O number 2
9	T_DIO_0	1.8V to 5.5V	CMOS output or input with weak pull-down	Target I/O number 0
10	T_DIO_1	1.8V to 5.5V	CMOS output or input with weak pull-down	Target I/O number 1
11	GND	-	-	Optional ground connection
12	GND	-	-	Optional ground connection
13	GO	0-1.0V or N/C	CMOS input with pull-up 10K	Input for programming activation in standalone mode
14	PASS_OUT	5.0V	CMOS output	Output for pass/fail/busy indication
15	FAIL_OUT	5.0V	CMOS output	Output for pass/fail/busy indication

ICP2(G3) Specification

3 Electrical Characteristics

3.1 Absolute Maximum Ratings

Symbol	Parameter	Min.	Max.	Unit
T _{ST}	Storage temperature	-30	+80	°C
T _A	Operating temperature	0	+60	°C
V _{IN}	Input supply voltage	-18	18	V
V _{USB}	USB supply voltage (VBUS)	-0.3	5.5	V
V _{RS}	RS-232 voltage	-15	15	V
V _{DD}	T_VDD voltage	-10	10	V
V _{PP}	T_VPP voltage	-10	20	V
V _{PRG}	T_SCK, T_MOSI, T_MISO, T_DIO_0, T_DIO_1 and T_DIO_2 voltage	-7.5	7.5	V
V _{TARG}	T_TARG voltage	-7.5	7.5	V
V _{GO}	GO voltage	-7.5	7.5	V
V _{PF}	PASS_OUT and FAIL_OUT voltage	-7.5	7.5	V

3.2 Recommended Operating Conditions

Symbol	Parameter	Min.	Max.	Unit
T _A	Operating temperature	0	+50	°C
V _{IN}	Input supply voltage	11	15	V
-	T_VDD current	-	200	mA
-	T_VPP resistive load to GND or T_VDD	1	-	KΩ
-	T_VPP capacitive load to GND	-	22	nF
-	T_SCK, T_MOSI, T_MISO, T_DIO_0, T_DIO_1 and T_DIO_2 resistive load to GND or T_VDD	1	-	KΩ
-	T_SCK, T_MOSI, T_MISO, T_DIO_0, T_DIO_1 and T_DIO_2 capacitive load to GND or T_VDD	-	33	pF

3.3 On-Board Flash Memory

(T_A = 0 to 50°C, unless otherwise specified. Typical values are referred to T_A = 25°C)

Param No.	Parameter	Test Condition	Min.	Typ.	Max.	Unit
M001	Capacity	All conditions	-	32	-	MByte
M002	Endurance	All conditions	10K	100K	-	-
M003	Data retention	All conditions	20	-	-	Years
M004	Logical number of environments	All conditions	-	6 (software after Oct-21)	-	-

3.4 On-Board EEPROM

(T_A = 0 to 50°C, unless otherwise specified. Typical values are referred to T_A = 25°C)

Param No.	Parameter	Test Condition	Min.	Typ.	Max.	Unit
E001	Secure non-volatile counter endurance	All conditions	8M	-	-	-
E002	Data retention	All conditions	40	-	-	Years

ICP2(G3) Specification

3.5 DC Characteristics

(TA = 0 to 50°C, unless otherwise specified. Typical values are referred to TA = 25°C)

Param No.	Parameter	Test Condition	Min.	Typ.	Max.	Unit
	Input Voltage					
D001	Input supply voltage	All conditions	11	-	15	V
D002	Input supply current	V _{IN} =12V, no operation	-	80	-	mA
D003	USB supply voltage	V _{IN} =0V	4.0	-	5.2	V
D004	USB supply current	V _{IN} =0V, V _{USB} = 4.9V, no operation	-	170	-	mA
	T_VDD Input/Output					
D010	Output high level	ICP powered mode	1.8	-	5.5	V
	Input high level	Target powered mode	1.8	-	6.0	V
D011	Current limit (short to GND)	V _{IN} =12V to 15V	250	300	-	mA
D012	Current limit (short to GND)	V _{IN} =0V, USB powered	40	50	-	mA
D013	Weak pull-down resistor	All conditions	-	30	-	KΩ
D014	Programmable strong pull-down resistor	All conditions	-	500	-	Ω
	T_VPP Output					
D020	Output high level	All conditions	1.8	-	13.5	V
D021	Current limit (short to GND). Note: higher current is available – contact Softlog	All conditions	30	-	-	mA
D022	Weak pull-down resistor	All conditions	-	160	-	KΩ
	Programming I/Os: T_SCK, T_MOSI, T_MISO, T_DIO_0, T_DIO_1, T_DIO_2					
D040	Output/input high level	All conditions	1.8	-	5.5	V
D041	Output impedance	All conditions	-	100	-	Ω
D042	Weak pull-down resistor	All conditions	-	300	-	KΩ
	GO Input					
D050	Input low level	All conditions	0	-	0.8	V
D051	Pull-up resistor	All conditions	-	10	-	KΩ
D052	Input high level	All conditions	4.0	-	5.0	V
	PASS_OUT and FAIL_OUT Outputs					
D060	Output impedance	All conditions	-	1.3	-	KΩ
D061	Output low level	No load	-	-	0.2	V
D062	Output high level	No load	4.8	-	-	V
	T_TARG Output					
D070	Output impedance	All conditions	-	1	-	KΩ
D071	Output low level	No load	-	-	0.2	V
D072	Output high level	No load	4.8	-	-	V

ICP2(G3) Specification

3.6 AC Characteristics

(TA = 0 to 50°C, unless otherwise specified. Typical values are referred to TA = 25°C)

Param No.	Parameter	Test Condition	Min.	Typ.	Max.	Unit
T_VDD Output						
A001	Rise time	V _{IN} =12V, V _{dd} =5.0V, no load	-	0.07	-	ms
A002	Fall time	V _{IN} =12V, V _{dd} =5.0V, no load	-	2	-	ms
A003	Rise time	V _{IN} =12V, V _{dd} =5.0V, C _{load} =100uF	-	1.5	-	ms
A004	Fall time	V _{IN} =12V, V _{dd} =5.0V, C _{load} =100uF	-	200	-	ms
A005	Rise time	V _{IN} =12V, V _{dd} =5.0V, C _{load} =1000uF, R _{load} =22Ω	-	20	-	ms
A006	Fall time	V _{IN} =12V, V _{dd} =5.0V, C _{load} =1000uF, R _{load} =22Ω	-	50	-	ms
T_VPP Output						
A010	Rise time	V _{IN} =12V, V _{pp} =13V, no load	-	0.1	-	us
A011	Fall time	V _{IN} =12V, V _{pp} =13V, no load	-	0.4	-	us
A012	Rise time to 0V to 10V	V _{IN} =12V, V _{pp} =13V, C _{load} =33nF	-	0.7	-	us
A013	Fall time from 13V to 1V	V _{IN} =12V, V _{pp} =13V, C _{load} =33nF	-	3	-	us
Programming I/Os: T_SCK, T_MOSI, T_MISO, T_DIO_0, T_DIO_1, T_DIO_2						
A030	Rise time	V _{dd} =5V, no load	-	10	-	ns
A031	Fall time	V _{dd} =5V, no load	-	10	-	ns
A032	T_SCK frequency	All conditions	-	-	10	MHz
A032	T_SCK programmable frequencies	All conditions	-	0.5, 0.625, 0.714, 0.833, 1.00, 1.25, 1.67, 2.5, 5.0, 10.0	-	MHz

Information furnished is believed to be accurate and reliable. However, Softlog Systems assumes no responsibility for the consequences of use of such information or for any infringement of patents or other rights of third parties which may result from its use. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied.

© 2024 Softlog Systems (2006) Ltd. - All Rights Reserved

<http://www.softlog.com>