

ICP2(G3)

Production Quality In-Circuit Programmer



**Softlog
Systems**

ICP2(G3) is the flagship product in our line of high-speed, production-grade in-circuit programmers for Microchip microcontrollers. Combining robust performance with proven reliability, ICP2(G3) is the ideal solution for high throughput, non-stop assembly line operations. Using our breakthrough Secure Programming technology, ICP2(G3) ensures the highest level of protection for your intellectual property during the manufacturing process.



- Very fast programming
- Innovative, multi-layer IP protection (optional)
- Easy ATE integration
- PC or standalone operations
- Cost-effective pricing options

Secure Programming

Secure Programming optional software feature provides several layers of protection that dramatically reduce the risk of unauthorized reconstruction of hex files. These include strong hex file encryption, a counter that ensures the number of programmed devices does not exceed a pre-defined value, and a secure buffer of "invisible" hex data stored in ICP2(G3) protected memory.

Microchip-Oriented

Reflecting our focus and expertise in working with Microchip, ICP2(G3) is specifically designed for full compatibility with all Microchip microcontrollers and peripheral components. ICP2(G3) family hardware virtually supports popular programming interfaces (ICSP™, JTAG, SWD, UPDI, SPI, QSPI, etc.) used by Atmel, SST and others

ATE Compatible

Final test machine (FTM) functions in DLL allow the ICP2 family software to easily integrate with test equipment, working in either standalone mode or driven by a host system. Adaptable to bed-of-nails and other types of ATEs, ICP2(G3) helps you preserve your investment in test equipment.

24x7 Support

We understand the importance of zero downtime on your assembly line. Softlog's technical support engineers are available round-the-clock to provide you with immediate solutions to operational and maintenance issues which may arise.

www.softlog.com

ICP2(G3)

Production Quality In-Circuit Programmer

High-Speed, Compact Programming Device

- Designed for ICSP™, JTAG, SWD, UPDI, SPI, QSPI, etc. used by Microchip, Atmel, SST and others
- On-board 32MB flash memory for non-volatile storage of HEX, configuration and serialization files
- Multiple serialization schemes:
 - Sequential, random, pseudo-random and user file
 - 1 to 8 bytes, automatic "retlw"
- Tests Vdd and Vpp for overload with indication by software
- Dimensions: 175 x 85 x 35mm

Programmable Hardware


- Remote programming via 3 lines: Go/Pass/Fail
- Programmable Vdd (1.8 to 5.5V) and Vpp (1.8 to 13.5V)
- Programmable delay between Vdd and Vpp (0.1 to 250ms)
- Programmable clock/data speed (500KHz to 10MHz)
- Programmable Vdd source (ICP2(G3) or target)
- Vdd current limit: 250mA (40mA if powered from USB only)
- Prevents damage to connected microcontroller in case of power ON and power OFF

Easy-to-Use Software

- Windows® DLL/Command line functions for automatic programming (optional)
- Secure programming feature including hex file encryption, counter and secure buffer (optional)
- Standalone operation
- Field firmware upgrade (built-in bootloader)

Host System Requirements

- Windows®-XP/7/8/10
- USB or RS232 port

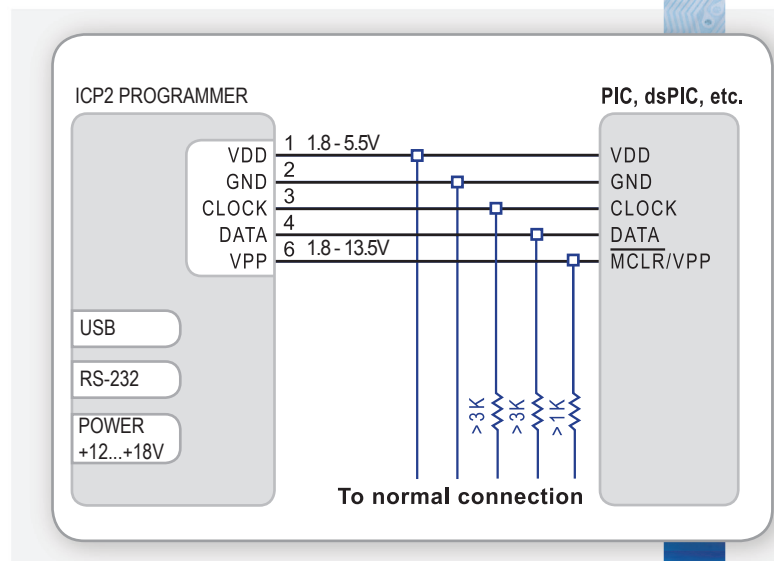

Typical in-circuit programming connection

About Softlog Systems

Softlog Systems specializes in In-Circuit Serial Programming (ICSP™) for Microchip microcontrollers. Since 1998, our high-performance, cost-effective ICSP™ solutions have been used to manufacture millions of products worldwide. Leveraging our technical know-how and extensive field experience, Softlog Systems' ICP family of production-grade programmers reduce manufacturing costs and accelerate time-to-market.



Softlog Systems (2006) Ltd.

6 Hayotzrim St., Or-Yehuda 6021820 Israel

Tel: 972-3-9515359 Fax: 972-3-9527520

email: sales@softlog.com

www.softlog.com